


Maximum 1462 kW (1961 hp) @2300 RPM (PLEASURE CRAFT)

**STANDARD EQUIPMENT**

**MGX-6598DC**

- Vertical offset, aluminum housing
- Electric GP-valve with manual override
- EC050 Profile module
  - interface for engagement signals
- Integral oil cooler for raw water cooling
- Oil strainer and oil filter

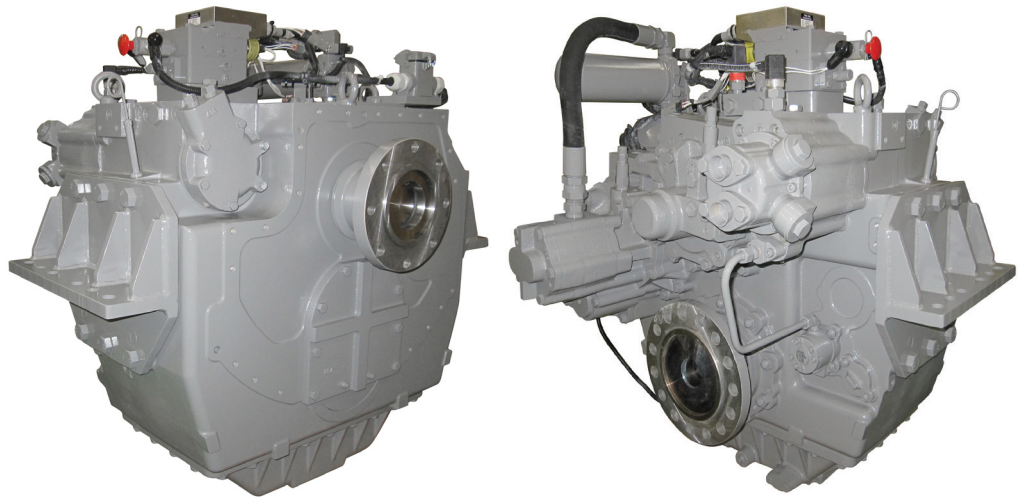

**INPUT RATINGS - KILOWATTS (KW) (HORSEPOWER (HP))\***

For service classification definitions and important notes refer to [www.twindisc.com](http://www.twindisc.com), the Twin Disc Marine Product Guide or contact Twin Disc directly.

Reduction Ratios :1	Pleasure Craft @ 2300 RPM	Light Duty @ 2300 RPM	Intermediate Duty @ 2100 RPM	Medium Duty @ 1800 RPM	Continuous Duty @ 1800 RPM
2.46, 3.03	1462 kW (1961 hp)	1278 kW (1714 hp)	1000 kW (1341 hp)	824 kW (1105 hp)	771 kW (1034 hp)
3.48		1241 kW (1664 hp)	945 kW (1267 hp)	779 kW (1045 hp)	729 kW (978 hp)
3.93	1343 kW (1801 hp)	1131 kW (1517 hp)	861 kW (1155 hp)	710 kW (952 hp)	664 kW (890 hp)
4.43	1172 kW (1572 hp)	1055 kW (1415 hp)	804 kW (1078 hp)	662 kW (888 hp)	619 kW (830 hp)

\* Ratings shown for use with standard right-hand rotation engines.  
The maximum allowable rated engine speed is 2500 rpm.



Specifications subject to change without prior notice in the interest of continual product improvement.  
Contact your local Twin Disc representative for engineering specifications, Survey Society Approvals and Classifications.

Scan QR code to see Twin Disc's entire Marine product line.



## OPTIONS

SAE J617 housing no. 1

SAE J617 housing no. 0

Flexible coupling for 14" flywheel (SAE J620 size 355)

Flexible coupling for 18" flywheel (SAE J620 size 460)

Input hub for freestanding installation

EC050 E-Troll module – interface for engagement & trolling signals

Harness with single point interface to Twin Disc EC300 control system

Output shaft driven trailing pump

Companion flange/ bolts set

Monitoring devices to customer's specification

Mounting brackets

Live PTO

SAE J744 size 127-4, 32-4 (SAE "C", 4-bolt) – max. 600 Nm

Hydraulic Clutchable PTO

SAE J744 size 127-4, 32-4 (SAE "C", 4-bolt) – max. 600 Nm


Secondary live PTO for power steering pumps

SAE J744 size 101-2, 22-4 (SAE "B", 2-bolt) - max. 75 Nm or

SAE J744 size 82-2, 16-4 (SAE "A", 2-bolt) - max. 75 Nm

Dry weight incl. SAE #1 housing and SAE 355 flexible coupling: **580 kg**

## MGX-6598DC

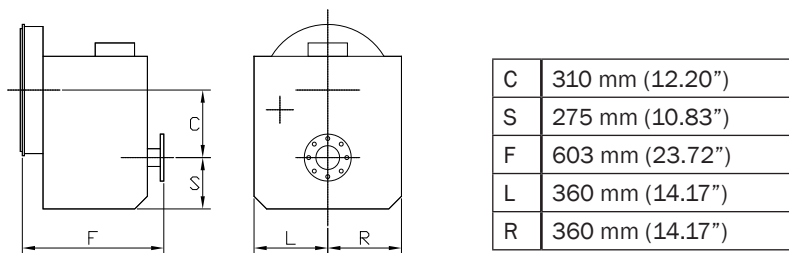

Twin Disc, Incorporated reminds users of these products that their safe operation depends on use in compliance with engineering information provided in our catalog. Users are also reminded that safe operation depends on proper installation, operation and routine maintenance and inspection under prevailing conditions. It is the responsibility of users (and not Twin Disc, Incorporated) to provide and install guards or safety devices which may be required by recognized safety standards or by the Occupational Safety and Health Act of 1970 and its subsequent provisions.

United States of America • Australia • Belgium • Canada • China • India • Italy • Singapore • Switzerland

For nearly a century, we've been making boats perform better and more reliably. From system-design consultation to application development to in-service support, Twin Disc provides fully integrated propulsion solutions that will optimize your craft's performance, reliability and safety over the years. Bring Twin Disc aboard early in the development process, and you'll enjoy a lifetime of enhanced operating value.

TRANSMISSIONS • ELECTRONIC CONTROLS • EXPRESS JOYSTICK SYSTEM® • SAILDRIVES • EXPRESS POSITIONING® • ARNISON SURFACE DRIVES • MARINE CONTROL DRIVES • ROLLA PROPELLERS • BOW & STERN THRUSTERS • STEERING SYSTEMS • RUDDERS • TRIM TABS



Twin Disc, Incorporated  
Racine, Wisconsin 53403 USA  
Phone +1-262-638-4000  
Fax +1-262-638-4482  
[www.twindisc.com](http://www.twindisc.com)

TD-Bulletin-MGX-6598DC  
© 2016, Twin Disc, Incorporated  
Printed in the USA - 2/2016